




Specification for:  
**YJ-40603-TC**

111 Zeta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email:magnetics@spang.com

**DIMENSIONS**

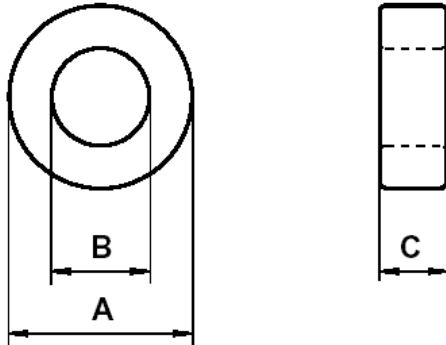

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	5.84	5.48	6.20
I.D. (B)	3.05	2.69	3.41
Ht. (C)	3.18	2.85	3.51

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
4.3	13	56

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
2040 ± 20%	Up to 200 kHz, 0.5 mT (For N = 1, use 0.6 mA), 25°C

**ELECTRICAL LOSSES**

tan δ / μ <sub>i</sub>	Test conditions
≤ 12 · 10 <sup>-6</sup>	100 kHz, 0.5 mT, 25°C

**COATING**

Parylene rated for 130°C continuous operation.
Voltage breakdown rating 1000 V Min Wire-to-Wire.

**NOTE**

Spec. Modifications	Previous	Revised
2005.06.07	LF: General J Material	LF: Detail as indicated