




Specification for:  
**ZW-41206-TC**

111 Zeta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email:magnetics@spang.com

**DIMENSIONS**

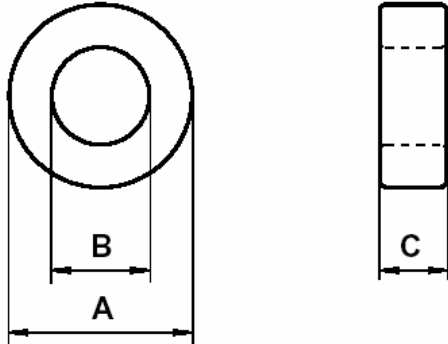

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	12.7	12.43	13.47
I.D. (B)	5.16	4.39	5.43
Ht. (C)	6.35	6.19	7.01

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
22	25	550

**INDUCTANCE**

A <sub>L</sub> value (nH/T <sup>2</sup> )	Test conditions	
11280 ± 30%	10 kHz	0.5 mT (For N = 5, use 0.117 mA), 25°C

**ELECTRICAL LOSSES**

tan δ / μ <sub>i</sub>	Production lot limit Average	Test conditions	
≤ 3.5 · 10 <sup>-6</sup>	≤ 3 · 10 <sup>-6</sup>	10 kHz	0.5 mT, 25°C
≤ 55 · 10 <sup>-6</sup>	≤ 45 · 10 <sup>-6</sup>	100 kHz	

**COATING**

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V Min Wire-to-Wire.

**NOTE**

Spec. Modifications	Previous	Revised
2006.01.12	Breakdown voltage > 1,000 V LF: General W Material	Breakdown voltage > 1,500 V LF: Detail as indicated